


I will **support you for ever** with my nearly 20 years experience.

1. If you prefer email, I will do email support.
2. If you want phone support, I can call you(**Please tell me your phone number**)
3. Also can do teamviewer support to remotely connect to your computer to guide you, to provide live training for you.

1. For the wire diagram, picture attached.

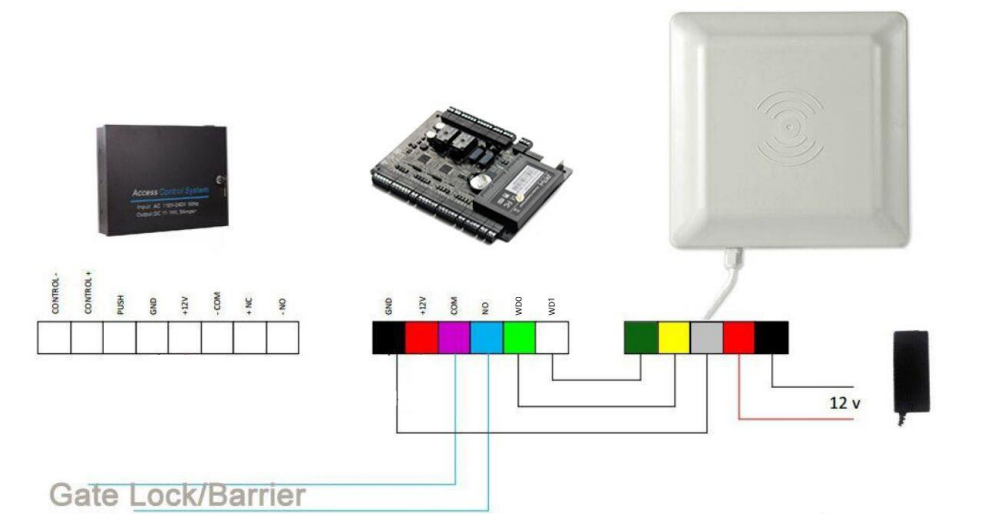

- The reader is powered on by it's own power adapter.
- Reader's grey wire, connect to GND of Control board.
- Reader's yellow wire, connect to WD0
- Reader's deep green wire, connect to WD1

Wire video as below:

<https://youtu.be/hwxuGhN3z2o>

2. Steps guide as below.

Step 1: Wire the long reader to the control panel, following the above diagram.

Install the software on computer, use network cable connect the control board to router or computer.

Step 2: Power on the long reader and the control board, in the software, search and add the control board.

Step 3: swipe the tag and do monitoring, get the tag number. Can do monitor the software to get the number.

Step 4: register this tag number, give it the access right, then swipe card, should hear a click voice from the control panel board.

Step 5: connect to lock or barrier .etc. normally use NO and COM

3. **For the control panel software:**

software video1:

<https://www.youtube.com/watch?v=zFiKedo8Ff0>

Software video2:

<https://youtu.be/mdEOISHyr7w>

Software download from below link(Be sure that **Software support: win7/win8/win10 both 32 and 64 bit system**)

http://beseencontrol.com/ZKAccess_3.5.3.15.zip

Firstly extract it to a new folder, **How to Install** software: **run related setup file: Setup.exe**